
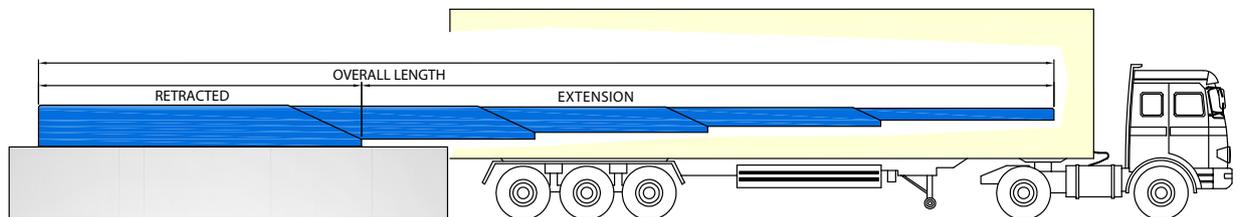


BESTREACH MAXXREACH TELESCOPIC BELT CONVEYORS

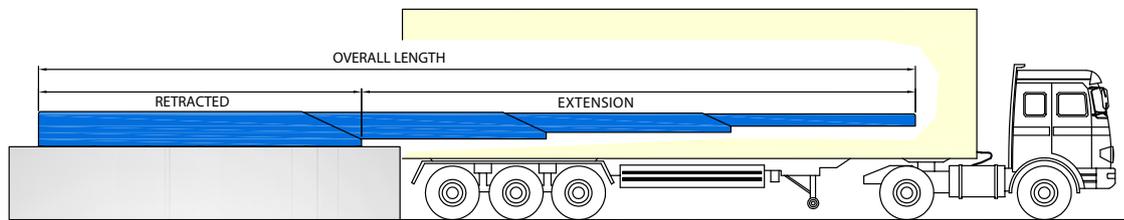

CONVEYORS with	BESTREACH						MAXXREACH		
	3 sections			4 sections			3 sections		
	BR3120s	BR3135	BR3150	BR4120	BR4150	BR4170	MR3170	MR3185	MR3198
Retracted	6m	6.5m	8m	5.5m	6.5m	7.5m	8m	8.8m	9.2m
Extension (Reach)	12m	13.5m	15m	12m	15m	17m	17m	18.5m	19.8m
Overall Length	18m	20m	23m	17.5m	21.5m	24.5m	25m	27.3m	29m

STANDARD EQUIPMENT

- Heavy Duty Construction, section thickness main case 10mm
- Standard equipment : Siemens STEP 7 PLC and LED headlight in front
- Loading capacity : 50 kg/metre, according to application
- Standard belt widths : 600 or 800mm (others on request)
- Height top of belt according to application



PERFORMANCE & ERGONOMICS

Man-Rider 650 x 1800mm

Hydraulic Tilt from -1 to $+3^{\circ}$
















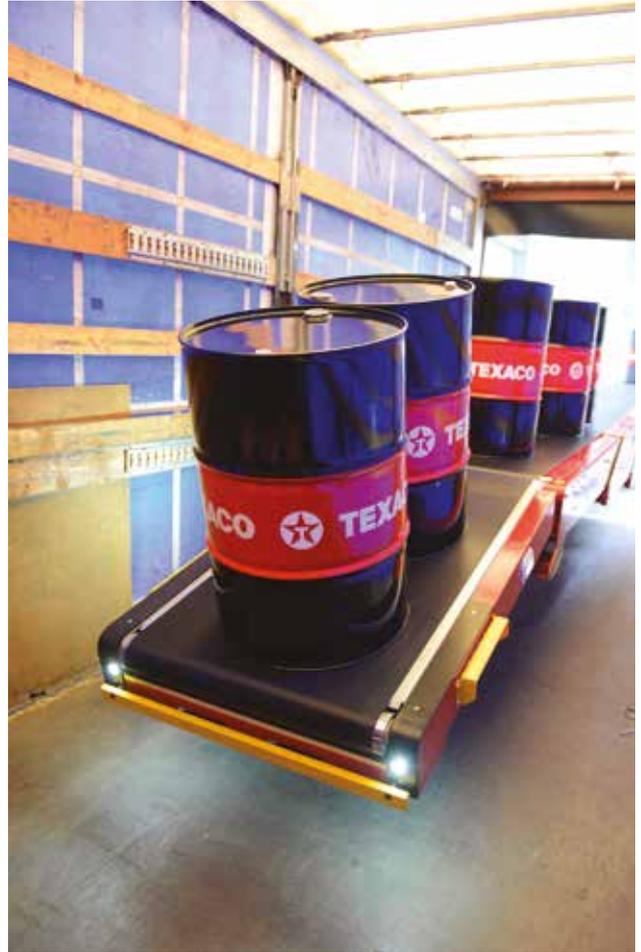



C O N V E Y O R S

A DURAVANT COMPANY



Exclusive distributor
for the Benelux & France

UVO Tec BV

FMH CONVEYORS Benelux & France

Tel : +32.3.455.43.22 - Fax : + 32.3.454.36.70

Email : info@uvotec.eu www.uvotec.eu

WE HAVE SPECIFIC SOLUTIONS FOR YOUR APPLICATION